

BTR-800

UHF 2-Audio Channel Wireless Synthesized Base Station



The RTS RadioCom BTR-800 UHF-synthesized wireless intercom systems offer the ultimate in reliable, high performance, high fidelity full-duplex communications. The BTR-800 system includes the BTR-800 frequency-agile base station, working with up to four (4) TR-800 or TR-825 frequency-agile beltpacks. The BTR-800 base station provides full-duplex communications with the beltpacks.

The BTR system incorporates two (2) audio channel operation, permitting the beltpack operator to choose between two (2) separate audio channels of communications, with the base station tracking the beltpack selection. This allows the user the flexibility to create a party line and a private line within the same beltpack.


The BTR-800 system is perfectly suited for standalone operation and can interface with Audiocom, RTS Two-Wire Intercom, Clear-Com as well as RTS Digital Matrix Intercom systems and other 4-wire communications systems. In addition to the external intercom systems interfaces listed above, the system provides connections for auxiliary balanced audio input and output, as well as WTA (Wireless Talk-Around) and SA (Stage Announce) features.

The RTS RadioCom BTR series has been designed for reliable, efficient operation. Operating in the UHF range, the units operate reliably at line-of-sight distances of 1,000 feet. With available antenna systems, from RTS RadioCom, the effective operating range can be extended. The high-efficiency beltpacks provide up to 12 hours of uninterrupted operation using standard alkaline batteries.

Features

- Frequency-agile base station & beltpacks.
- Backlit base station LCD.
- ClearScan function.
- Full-duplex operation.
- Compatible with Audiocom, RTS TW, Matrix, Clear-Com, and other wired intercom types.
- Two (2) channels of intercom audio.
- WTA (Wireless Talk Around) beltpack control.
- SA (Stage Announce) beltpack control. Relay contact closure on the base when the SA button is pressed.
- TR-825 features a two (2) audio channel binaural operation in either stereo or mono mode.
- Beltpack units contained in a weather and shock resistant diecast magnesium case.
- Convenient IEC power connector on the base station.
- Base station comes with rack ears for easy rack mounting.

Line Drawings

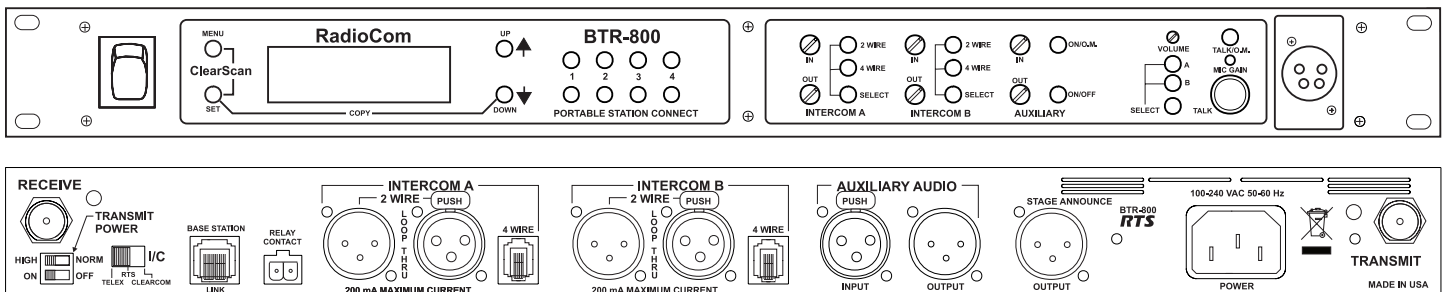

Specifications

RF Frequency Range:	470–608MHz, 614–698MHz (614–722MHz, Europe) in 18MHz TX and RX bands	Transmitter Type:	2 Synthesized Transmitters 712 channels each
Power Requirements:	100–240VAC, 50–60Hz IEC receptacle	Transmit Power (each transmitter):	100mW Max. (High) 10mW (Normal)
Temperature Range:	-4°F to 130°F (-20°C to 55°C)	Modulation Type:	FM
TX Antenna:	½ Wave (supplied), TNC Male Connector	Deviation:	40kHz (35kHz Europe)
RX Antenna:	½ Wave (supplied), TNC Male Connector	RF Frequency Stability:	0.005%
Frequency Response:	300Hz–8kHz	Modulation Limiter:	Peak-Responding compressor
4-Wire Input and Output:	Level Adjustable (2VRMS typical)	Radiated Harmonics & Spurious:	Complies with FCC specifications
AudioCom/Telex Intercom:	Input/Output Level Adjustable (1VRMS typical), Line Impedance 300Ω	Receiver Type:	Dual Conversion Superheterodyne four (4) Independent Synthesized IFs FM, 712 channels each
RTS Intercom:	Input/Output Level Adjustable (0.775VRMS typical), Line Impedance 200Ω	RF Sensitivity:	<0.8µV for 12dB SINAD
Clear-Com Intercom:	Input/Output Level Adjustable (1VRMS typical) Line Impedance 200Ω	Squelch Threshold:	20dB SINAD
Auxiliary Input	Adjustable (2VRMS typical)	IF Selectivity:	3dB at 230kHz
Auxiliary Output	Adjustable (2VRMS typical into 600Ω)	Image Rejection:	70dB or better
Stage Announce Output	Internally Adjustable (2VRMS typical at rated deviation into 600Ω)	Squelch Quieting:	90dB
Stage Announce Relay:	Dry contact, rated at 1Amp, 24VMax	RF Frequency Stability:	0.005%
Microphone Input Sensitivity:	9mV	Distortion:	<1% at full deviation
Local Headset Output:	40mW output into 600Ω (1% Distortion)	Product Dimensions/Weight	
		BTR- 800:	19" W x 1.72" H x 14" D (48.3cm x 4.4cm x 35.6cm) 7lb 2oz (3.24kg)
		Shipping Dimensions/Weight	
		BTR- 800:	17" W x 5" H x 23" D (43.2cm x 12.7cm x 58.4cm) 12lb (5.43kg)

NOTICE:

This wireless microphone system can be configured for both FCC Part 15 (unlicensed) and FCC Part 74 (licensed) operation. When shipped from the factory, this wireless microphone system is configured for unlicensed operation, and will operate at a power level not to exceed 50 milliWatts, which meets FCC Part 15 requirements. If unlicensed users operate this device in excess of 50 milliWatts, harmful interference may result and the unlicensed user will be subject to substantial monetary forfeitures and other FCC sanctions. The wireless microphone system may be operated by holders of a valid FCC license in the Low Power Auxiliary Radio Service under Part 74 of FCC Rules, at power levels between 50 milliWatts and 250 milliWatts.

CONSUMER ALERT

Most users do not need a license to operate this wireless microphone system. Nevertheless, operating this microphone system without a license is subject to certain restrictions: the system may not cause harmful interference; it must operate at a low power level (not in excess of 50 milliWatts); and it has no protection from interference received from any other device. Purchasers should also be aware that the FCC is currently evaluating use of wireless microphone systems, and these rules are subject to change.

For more information, call the FCC at 1-888-CALL-FCC (TTY: 1-888-TELL-FCC) or visit the FCC's wireless microphone website at www.fcc.gov/cgb/wirelessmicrophones.

Order Information

BTR-800 • UHF 2-Channel Wireless Synthesized Base Station with A4M headset jack
BTR-800-RTS • UHF 2-Channel Wireless Synthesized Base Station with A4F headset jack
BTR-800-RTS 5-Pin • UHF 2-Channel Wireless Synthesized Base Station with A5F headset jack

For ordering information, contact your regional sales representative at:
<http://rtsintercoms.com/us/intercom/contact>

The specification information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.