




NC-450A

PTT Hand Mic with A6F Connector

The NC-450A dynamic microphone is designed for voice paging applications requiring a rugged, hand-held microphone. The noise-canceling design makes it particularly effective for use in noisy locations, and the excellent voice response characteristics make it a good choice in quiet areas as well.

Wiring Diagram

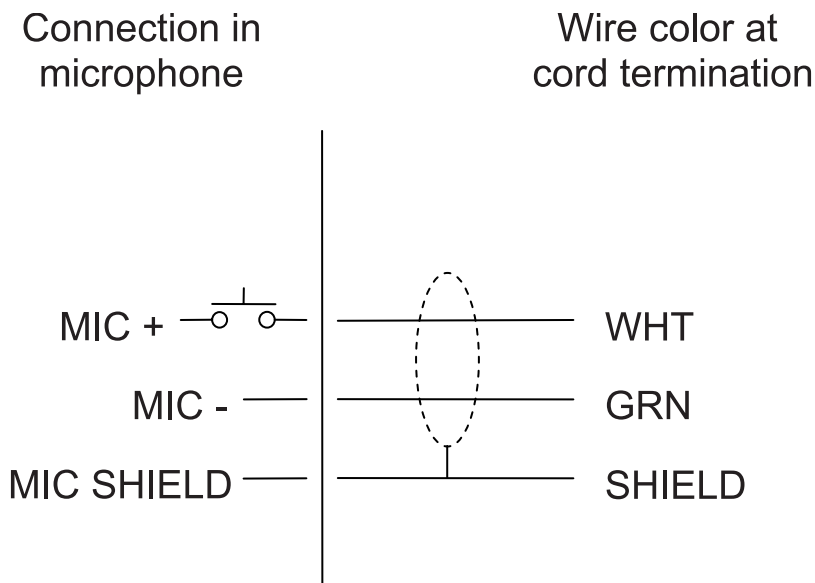

NC-450A Specifications

Connector Termination

XLR 6-pin Female coiled cord

Type

Hand Mic W/ PTT

Mic Type

Dynamic Noise-Canceling

Mic Sensitivity

-64dBV/Pa @1cm

Mic Frequency Range

100Hz - 8kHz

Mic Impedance

200Ω

Weight

10oz.

Cord Length

1.5 ft. retracted, 6 ft. extended

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: (800) 323-0498

Form Number: 38109638 Rev A
Date: December, 2007

Ordering Information**NC-450A**

PTT Hand Mic with A6F Connector
Catalog Number: 47005-10

This specifications information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.