

### 4030M

#### Passive IFB beltpack with 1/4" (6.3mm) Jack


The RTS model 4030M is a passive single channel listening station. In IFB applications, talent, such as newscasters, musicians, sportscasters, etc. can use the model 4030M to receive director instructions alone or to receive both audio program feed and director instructions. Behind-the-scenes personnel for production coordination and control may also use it. It connects directly to a port of all RTS digital matrix systems.



### Features

- Monaural 1/4" phone jack for headphone/earset connection.
- XLR type 3-pin female connector for audio/power connection.
- Volume control is dented to help prevent accidental maladjustment during use.

### Line Drawing

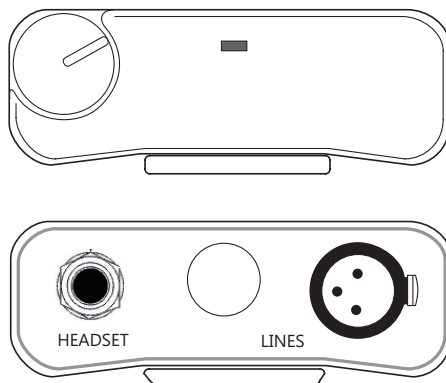

## Specifications

### General

#### Environmental Requirements

Storage: -20°C to 80°C (-4°F to 176°F); 0% to 95% humidity, non-condensing

Operating: 0°C to 50°C (32°F to 122°F); 0% to 95% humidity, non-condensing

Dimensions: 1.5" (38mm) H, 3.75" (95.3mm) W, 3.65" (92.7mm) D

Weight: 6.2oz (303g)

### Interface Requirements

Earset/Headphone Compatibility: Accepts 50 to 600  $\Omega$  earsets or headphones

#### Audio Input Requirements

Input Level: 2Vp-p (0 dBu) nominal

Input Impedance: 2000  $\Omega$   $\pm$ 5%

### Connector Pin Configurations

#### Headset Connectors

Type: 1/4" (6.3mm) Monaural Plug

Tip: Headset audio high

Sleeve: Headset audio low

#### Audio/Power Connector

Type: XLR-3F

Pin 1: Common

Pin 2: Channel 1 audio

Pin 3: Common

## Order Information

4030M • 4030M • Passive IFB beltpack with 1/4" (6.3mm) jack

The specification information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.