

MRT-327 User Station




The MRT-327 is a 2-channel intercom station for use in RTS-TW intercom systems. It may be used as a headset station or as a speaker station (with an optional MCS-325 modular speaker). The MRT-327 may be installed in optional console or rack mount configurations.

Features

- The MRT-327 can send and receive 20kHz call signals.
- The MIC on/off switch can be used as a momentary push-to-talk switch or as a latching on/off switch.
- The MRT-327 can receive 24kHz talk-off (mic kill) signals for deactivation of the MRT-327 microphone from a remote location.
- The microphone pre-amplifier circuit contains a limiter which helps to equalize output for different voice levels.
- The standard MRT-327 accepts a dynamic-mic headset used in conjunction with an external speaker located on the rear panel. It also has an optional jack for an MCP-90-xx gooseneck panel microphone.
- The MRT-327 receives operating power from the intercom line. It may be internally modified for local powering from a separate DC power supply or batteries.

Line Drawings

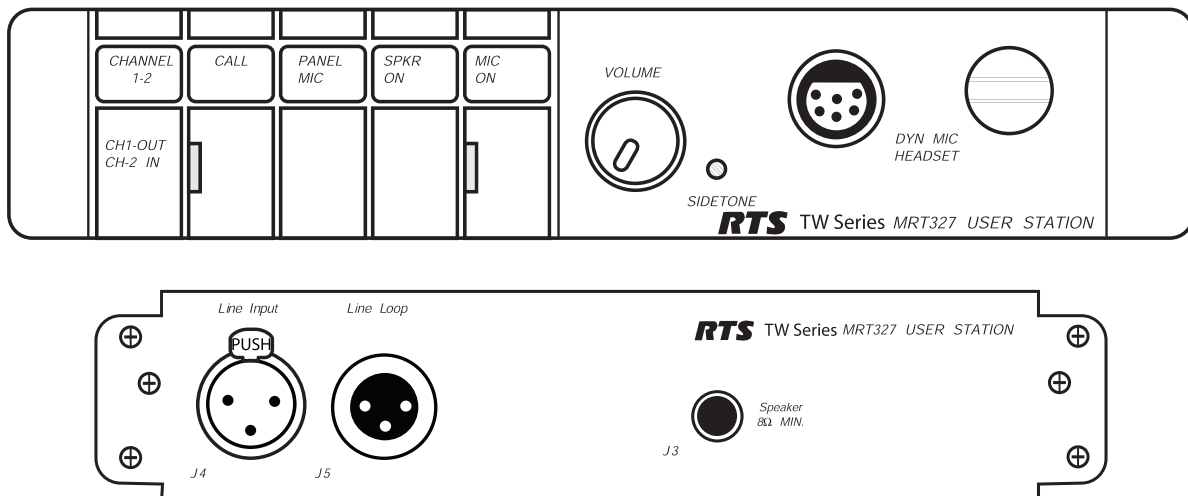

Specifications

General

Input DC Voltage:

Mode: 18 to 35 volts DC

Local Power: 15 to 35 volts DC (12 to 15 volts DC, reduced performance)

DC Current Drawn from TW Line

Quiescent: 45mA \pm 10%

Operating, 25 Ω phones: 75mA \pm 10%

Operating, 25 Ω phones + call light: 90mA \pm 10%

Operating, 8 Ω speaker:

240mA \pm 10%

Operating, 8 Ω speaker + call light:

300mA \pm 10%

DC Current Drawn from TW Line

Notes:

Operating current is measured with output level at 10dB below clipping.

Local power option draws no current from TW line.

Impedance Across Line:

10k Ω , minimum (designed for use with 200 Ω "TW" intercom lines)

Environmental Temperature:

Operating: 0°C to 50°C

(32°F to 122°F)

Storage: 40°C to 85°C

(104°F to 185°F)

Humidity:

Operating and Storage: 5% to 95%, non-condensing

Noise Contribution:

(Ch 2): <-60dBp

(Ch 1): <-80dBp

Microphone Preamplifier

Input Impedance:

470 Ω \pm 5% (dynamic mic)

Source Impedance:

200 Ω , (nom.)

Maximum Input Level:

150 millivolts

Frequency Response

(-54dB input): 100Hz to 8kHz \pm 3dB

Limiter Range:

30dB

Carbon Mic Excitation Current:

10mA, (nom.)

Microphone Current Source

Output:

3.3 mA into 200 Ω = \pm 1 volt peak, (nom.)

Speaker Amplifier

Maximum Voltage Gain:

30dB

Frequency Response:

100Hz to 8kHz \pm 4dB

Output Power:

1.5 watts into 8 Ω (nom.)

Speaker DIM (speaker muting during mic activation) adjustable,

-4 to -30dB (Factory set to -6dB)

Headphone Amplifier

Voltage Gain:

34dB

Output Voltage:

8 volts peak-to-peak into 25 Ω (nom.)

Output power:

½ watt peak into 25 Ω

Frequency Response:

150Hz to 10kHz \pm 3dB

Headphone Impedance Range:

25 to 600 Ω (600 to 2000 Ω with reduced levels)

Sidetone Adjustment Range:

-20dB to full on

Call Light

Signalling Frequency:

20kHz \pm 100Hz

Talk-Off

Frequency:

24kHz \pm 100Hz

Connectors

Dynamic Microphone Headset:

XLR type 6 pin female

Panel Microphone:

¼-inch standard phone jack, 3-circuit

Line Input:

One (1) XLR type 3-pin female and one (1) XLR type 3-pin male, wired in parallel

Mechanical

Dimensions:

1.71" (44mm) H x 8.2" (208mm) W x

9.0" (228mm) D

Weight:

2.75lb (1.25kg)

Construction/Finish:

Aluminum case, thermoplastic front panel, light gray finish

Order Information

MRT327 A4F • MRT-327 A4F • 2 user programmable modular user station

MRT327 A5F • MRT-327 A5F • 2 user programmable modular user station

The specification information is preliminary and is subject to change without notification.
Brand names mentioned are the property of their respective companies.

Bosch Security Systems, Inc. | 12000 Portland Avenue South | Burnsville, Minnesota 55337
Telephone: 877-863-4169 | Fax: (800) 323-0498
Form Number: F01U259392 Rev 04
Date: February 2013

RTS
www.rtsintercoms.com