KP 12 CLD RVON-2 Option Card Installation Instructions

The RVON-2 option card allows you to install VoIP technology into the keypanel.

IMPORTANT: Be sure to remove the knock-out piece on the rear panel of the GPIO Expansion unit.

NOTE: You must have the GPIO expansion unit installed to use an RVON-2 card. However, coupling a KP 12 CLD and an RVON-I/O gives you RVON capabilities, as well.

To **install the RVON-2 Option card in the GPIO Expansion Unit**, do the following:

NOTE: You do not need to uninstall the GPIO Expansion Unit from the KP 12 CLD when you install the RVON-2 Option Card.

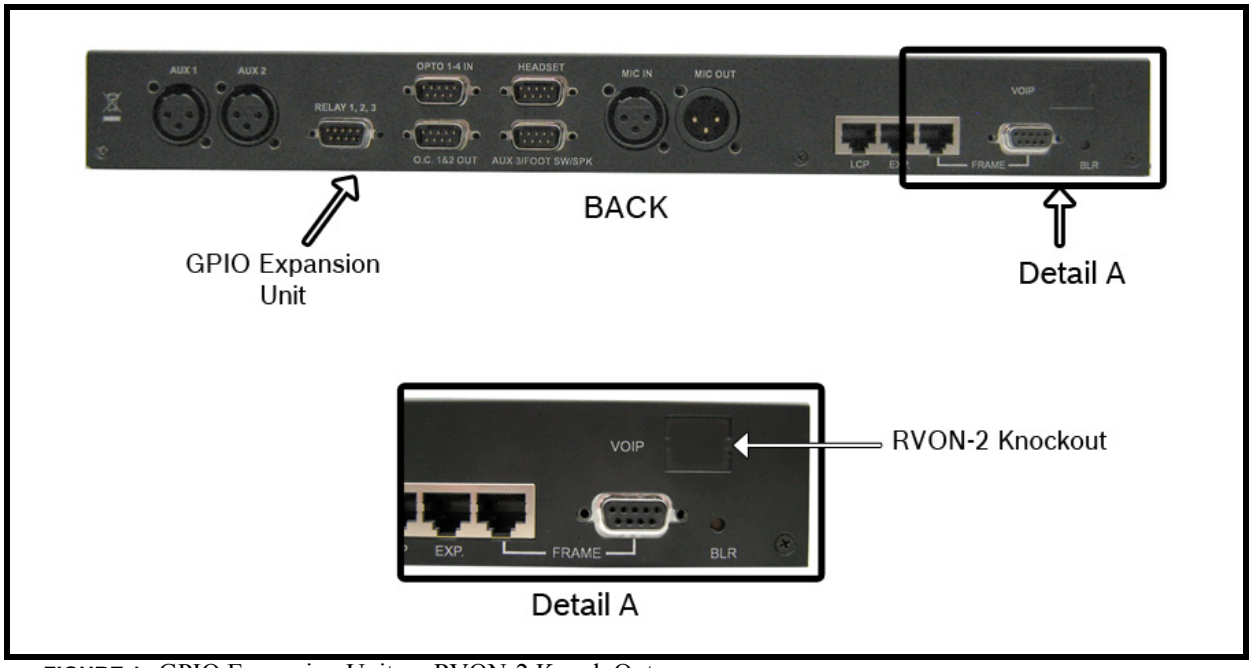

FIGURE 1. GPIO Expansion Unit — RVON-2 Knock Out

1. Using a screwdriver, remove the **three (3) screws** on the top of the GPIO expansion unit.