RTS Digital Matrix Intercom

Innovating the Future of Communications

RVON-2 (90027877001) Quick Start Guide (DKP 16 CLD)

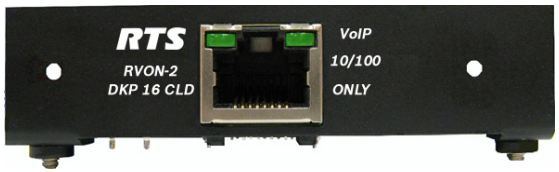

INCLUDED PARTS:

- DKP 16 CLD RVON-2 Option Card (90207877001)
- KP CLD Resource Disk
- 2 – Screw, 4-40 x 1/4 Pan Head, black

DKP 16 CLD RVON-2 Installation

To **install the RVON-2 Option Card into the DKP 16 CLD**, do the following:

1. Power **OFF** the DKP 16 CLD.
2. Remove **(4) pan head screws** from the bottom of the unit.

3. Carefully lift the **DKP top panel** off of the unit and set it aside.

Important: You will not be able to remove the entire top panel off because of the many other connectors within the unit.

If a GPIO Option Card is installed, continue to the next step, otherwise, skip to step 7.

4. Disconnect the **ribbon cable connected at J6** on the GPIO option card and tuck it towards the front of the unit so it is out of the way.

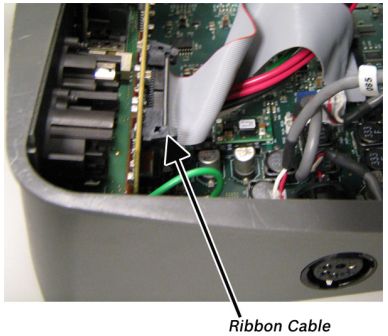

Detail View A

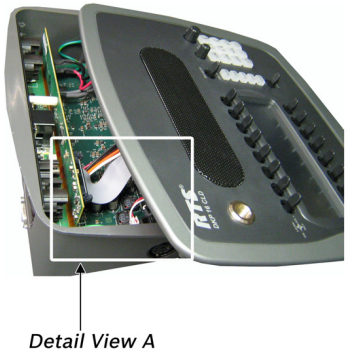

Detail View A

5. Gently, but firmly, lift **up and out** on the GPIO Option Card and set aside.
6. Carefully disconnect **J34** from the main board.

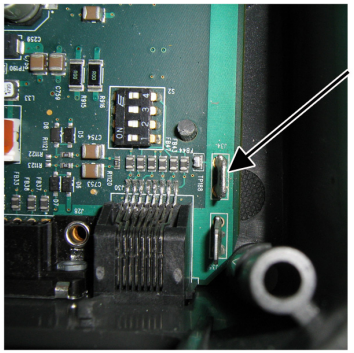

Detail View B



Detail View B