



Zeus Digital Matrix Intercom System

The Zeus DSP Matrix Intercom System not only provides superior performance and reliability for all your communications needs, but can also function as the heart of a complete audio mixing/routing and control systems for many facilities.

The RTS Zeus DSP Matrix intercom system provides 24 channels of high-quality audio in a compact 2-rack unit package. Each channel is capable of supporting any of the RTS line of matrix keypanels, or Four-Wire inputs and outputs for program and IFB feeds.

The Zeus system comes complete with AZedit, Windows based, full-featured configuration software, providing online and offline configuration capabilities. Meet any communication need without rewiring, jumper changes, or the need to take the system offline. Most changes can be made through the use of one of RTS' intelligent keypanels, where the more involved changes can be achieved either on or offline through the use of AZedit.


Zeus also comes standard with full support for Point-to-Point communications, party line conferences, IFBs, ISOLate, and special lists. With 8 GPI/Os, control of external devices, including two-way radios, VOXs, tally and alarm indicators, is greatly increased. A back panel serial port is also provided for connection of RTS accessories including additional GPI, level control panels, conference assign panels, and program assign panels.

Features

24 Ports
CD Quality Audio
GPI/O Included

Non-Volatile Memory
Port Status LEDs
Cost Effective

Line Drawing

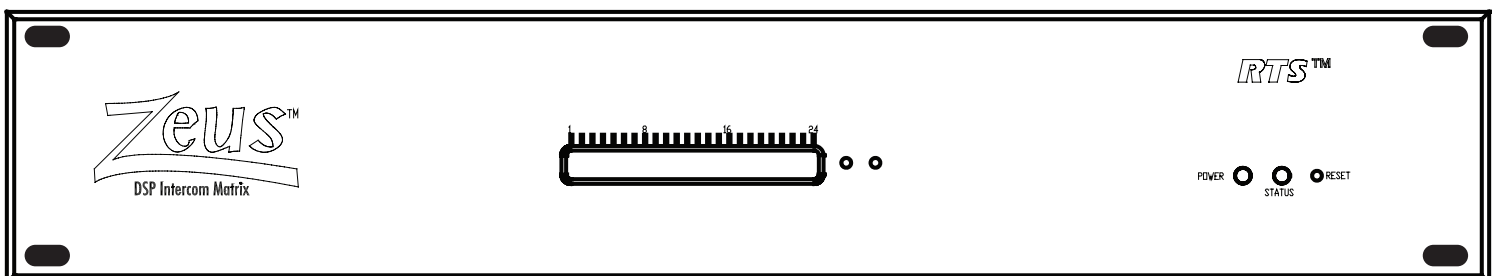

Zeus Specifications

Power Input

IEEC power connector with fuse and power switch. Internal switching power supply accepts 90-250 VAC, 50/60 Hz, 60 Watts max.

Controls and Indicators

Power On / Off toggle switch, located on back panel

Reset pushbutton switch, recessed in front panel

Diagnostic pushbutton switches (2), recessed in front panel

Power On indicator

General Status Indicator

Keypanel Status indicators (24)

Zeus controller status indicator

Zeus audio status indicator

Zeusedit status indicator

UIO-256 status indicator

LCP-102 status indicator

Miscellaneous diagnostic indicators (19, for service only)

Note: all indicators located on front panel

Analog Audio Specifications

Signal Type: Fully differential (balanced)

Nominal Level: 8 dBu

Maximum Level: 20 dBu

Input Impedance: High (22 k Ω)

Output Impedance: Low (600 Ω)

A/D and D/A Specifications:

Sampling Rate: 44.1 kHz

Resolution: 20 Bits

Converter Architecture: 128x Oversampling D-S Modulator

Audio Performance

SNR at 20 dBu: (A-weighted): > 90 dB

THD+N at 20 dBu, 1 kHz (Unweighted): < 0.007%

Frequency Response at 20 dBu: within ± 1 dB from 50 Hz - 20 kHz

Crosstalk at 20 dBu: < -80 dB

CMRR: > 85 dB

All measurements performed using an Audio Precision System 1

Dual Domain System. Measurements were performed using a sine wave at: $f = 1$ kHz and Level = 20 dBu.

Measurement bandwidth = 20 Hz to 20 kHz.

Connections

Intercom Channels (J1 to J24)

General: 4-wire, balanced audio; RS-485 data for optional intelligent keypanels

Connector type: 9-pin male D-sub (DE-9P)

Pin 1: Keypanel data +; Pin 2: Keypanel data -; Pin 3: Audio out shield; Pin 4: Audio in + (high); Pin 5: Audio in - (low); Pin 6: Keypanel data shield; Pin 7: Audio out - (low); Pin 8: Audio out + (high); Pin 9: Audio in shield

Configuration Computer (J25)

General: RS-232 Serial port

Connector type: 9-pin female D-sub (DE-9S)

Pin 2: RX; Pin 3: TX; Pin 5: Ground

Accessory Connector (J26)

General: An RS-485 data port for LCP-102 / PAP / UIO-256 connection.

Connector type: 9-pin female D-sub (DE-9S)

Pin 1: LCP-102 / PAP / UIO-256 RS-485 data -; Pin 2: ground; Pin 3: N/C; Pin 4: N/C; Pin 5: N/C; Pin 6: LCP-102 / PAP / UIO-256 RS-485 data +; Pin 7: ground; Pin 8: N/C; Pin 9: N/C

GPI (General Purpose Interface) Connector (J27)

General: Provides 8 control inputs which can simulate keypanel keys, and 8 control outputs which can be assigned to keys and used to activate external devices.

Connector type: 25-pin female D-sub

Physical/Power

Power Requirements: 90-250 VAC, 50/60 Hz, 60W

Size: 3.5" H x 19" W x 17 D" (88.9mm H x 482.6mm W x 431.8 D)

Weight: 10.14 lbs (4.6 kg)

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: 800-955-6831

Form Number: LIT000033000

Date: April, 2006

Ordering Information

Zeus

Digital Matrix Intercom System

Catalog Number: 90007634000

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.