




PH-1

Single-Sided Headset with Flexible Dynamic Boom Mic

The PH-1 is a medium-weight single-sided headset with foam-filled cushions that offer a light feel with moderate isolation from ambient noise. The dynamic noise-canceling mic is easily positioned with a unique ball joint for continuous adjustability. Available with 4-pin male or female XLR connectors, a 5-pin male XLR connector, or pigtail termination.

Wiring Diagram

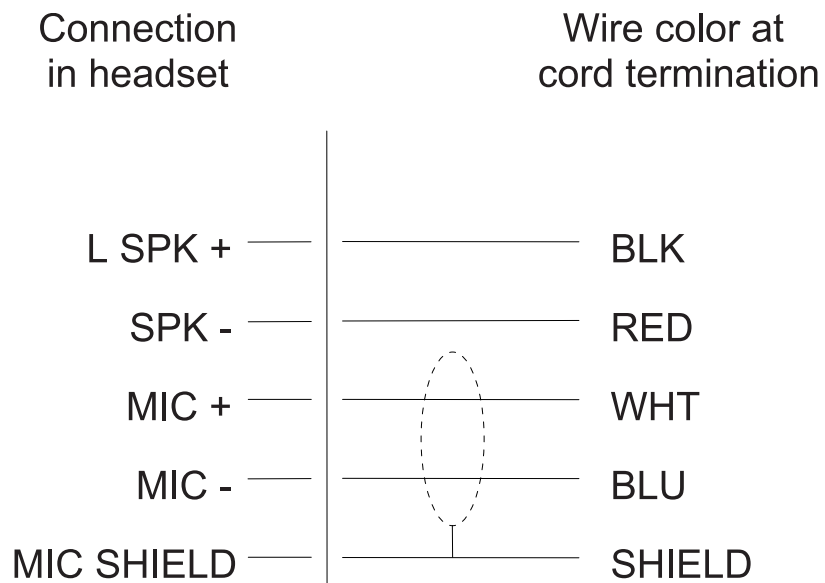

PH-1 Specifications

Connector Termination

PH-1: XLR 4-pin Female

PH-1PT: Stripped Wire

PH-1R: XLR 4-pin Male

PH-1R5: XLR 5-pin Male

Type

Single-Sided

Mic Type

Dynamic Noise-Canceling

Mic Sensitivity

-65dBV/Pa @1cm

Mic Frequency Range

200Hz - 6kHz

Mic Impedance

150ohm

Speaker Sensitivity

95dB SPL @1kHz, 1mW

Speaker Frequency Range

100Hz - 10kHz

Speaker Impedance

300ohm

Weight

11oz. (not including cord)

Cord Length

5.5 ft.

Contact Information

Telex Communications, Inc.
12000 Portland Avenue South
Burnsville, Minnesota 55337
Telephone: 877-863-4169
Fax: (800) 323-0498

Form Number: LIT000217000 Rev A
Date: December, 2007

Ordering Information

PH-1

Single-Sided Headset with Flexible Dynamic Boom
Mic & A4F Connector
Catalog Number: 64438-100

PH-1PT

Single-Sided Headset with Flexible Dynamic Boom
Mic, A4F Connector & Pigtail Termination
Catalog Number: 64438-202

PH-1R

Single-Sided Headset with Flexible Dynamic Boom
Mic & A4M Connector
Catalog Number: 64438-102

PH-1R5

Single-Sided Headset with Flexible Dynamic Boom
Mic & A5M Connector
Catalog Number: 64438-103

This specifications information is preliminary and is subject to change without notification.

Brand names mentioned are the property of their respective companies.